



A240 NAMUR Type Solenoid Valves

Proval A240 type solenoid valves are designed for direct assembly on rotary type NAMUR interface pneumatic valve actuators.

Technical Specifications,

- * Direct mounting on NAMUR interface actuators
- * Easy convertible between 3/2 and 5/2 way (DA or SR) by replacing the o-ring position
- * Lockable manual operator
- * Standard IP65 enclosure single coil (spring return)

Optional Specifications,

- * Dual coil construction
- * Eex m II T5 explosion proof coil



NAMUR Type Solenoid Valves

Technical Specifications


Power Supply	12 VDC	24 VDC	24 VAC	110 VAC	220 VAC
Power Consumption	3W	3W	5VA	5VA	5VA
Air Supply	G 1/4"				
Working Pressure	2 - 10 bar				
Protection Class	IP65 (Optional Eex m II T5 ATEX)				
Working Temperature	-10 °C ~ + 70 °C				
Flow Capacity	720 Lt/min				

Material List

Part Name	Material
Body	Hard Anodised Aluminum Extrusion
Piston	Aluminum Extrusion
Screw	AISI316 Stainless Steel
Spring	AISI316 Stainless Steel
Seal	NBR

NAMUR Solenoid Valve Types	
Model	Description
A240	5/2-3/2 Convertible Single Coil, NAMUR Type
A240C	5/2-3/2 Convertible, Dual Coil, NAMUR Type

Accessories for Solenoid Valves	
Model	Description
A240PB	9mm Coil, IP65
A240PBX	9mm Coil, Exproof "m" Class
A240SP	Standard Socket
A240SPL	Socket with LED

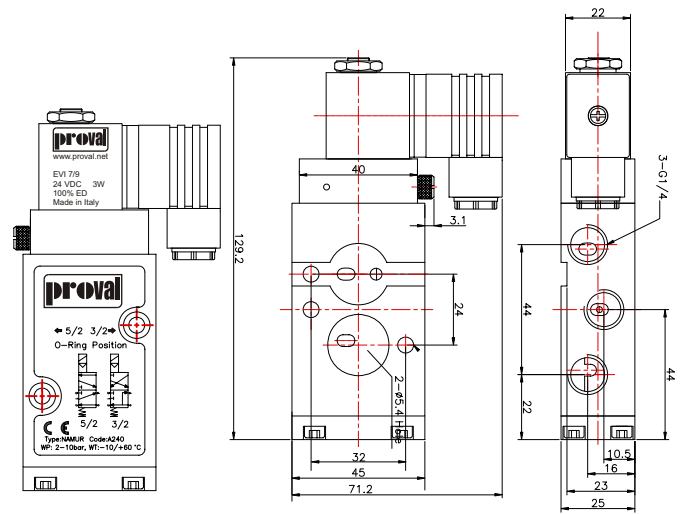

A240 PBX



A240 PB



A240 SPL



A240 SP

A244 NAMUR Type 5/3 Dual Coil Solenoid Valves

