


### General information

**Lucifer ref.:** U341N3250 Note 1  
**Global ref.:** 7341NRKNNN00  
**Housing ref.:** NL  
**Coil ref.:** 481865  
**Protection class:** -  
**Assembly wt. (g):** -

**Body:** 316L Stainless Steel body  
**Seat disc:** NBR  
**Ways notation:** 3/2 or 5/2  
**Valve function:** 3- or 4-way  
**Valve actuation:** Pilot operated  
**Mounting:** NAMUR interface



### Specifications

#### Connection / Orifice

**Port size (inches):** 3/8 - 1/4  
**Nom. dia. (mm):** 8  
**Orifice EXH. (mm):** -

#### Flow factors

**Qn (L/min):** 1400  
**Qn EXH. (L/min):** -  
**C (dm<sup>3</sup>/s bar):** -  
**Kv (L/min):** -  
**Kv EXH. (L/min):** -  
**Qmax (L/min):** -

#### Temperature values (°C)

##### a. Fluid temperatures

	Min.	Max.
With air:	-25	80
With water:	-	-
With steam:	-	-
With oil:	-	-

#### Pressure values (Bar)

**Min. pressure:** 2.00  
**Max. press. (DC):** 10.00  
**Max. press. (AC):** 10.00

#### Power values (W)


**Power DC:** 9  
**Power AC:** 8

##### b. Ambient temperatures

**Minimum:** -25  
**Maximum:** 50

### Notes

- 1 Valve with NPT ports

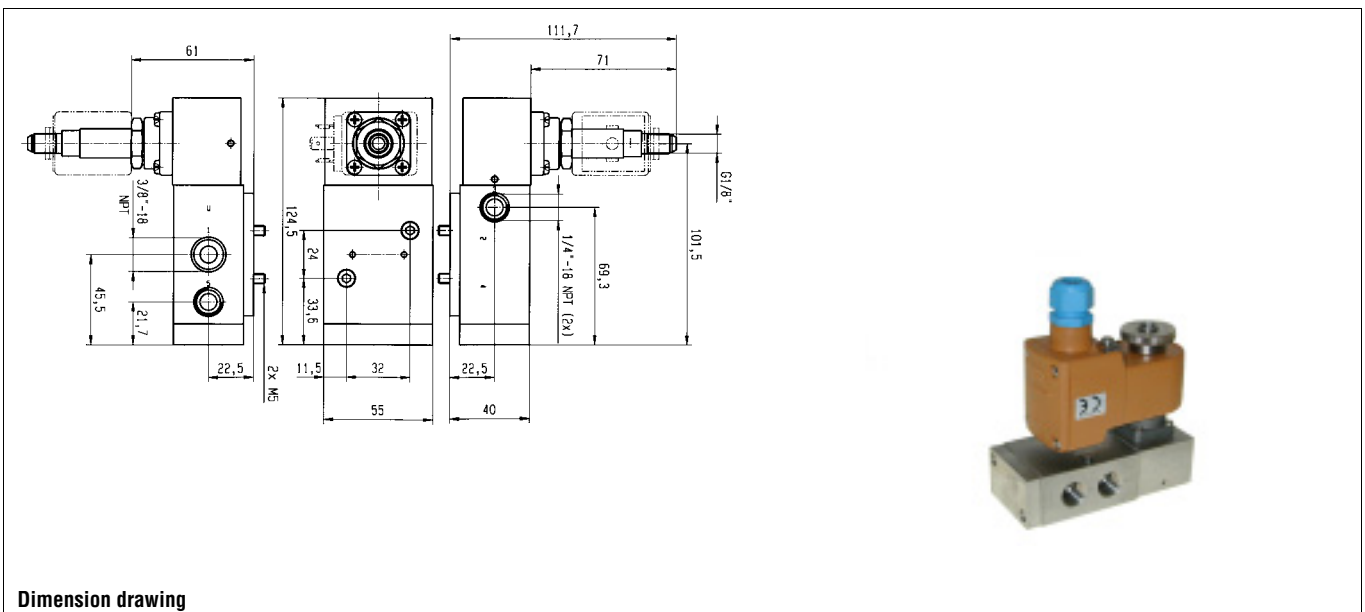

Dimension drawing