


General information

Lucifer ref.: U341N3292 Note 1	Body: 316L Stainless Steel body
Global ref.: 7341NRKNNN92	Seat disc: NBR
Housing ref.: NL	Ways notation: 3/2 or 5/2
Coil ref.: 483580.01	Valve function: 3- or 4-way
Protection class: EEx ia IIC T6	Valve actuation: Pilot operated
Assembly wt. (g): -	Mounting: NAMUR interface



Specifications

Connection / Orifice

Port size (inches): 3/8 - 1/4
Nom. dia. (mm): 8
Orifice EXH. (mm): -

Flow factors

Qn (L/min): 1400
Qn EXH. (L/min): -
C (dm³/s bar): -
Kv (L/min): -
Kv EXH. (L/min): -
Qmax (L/min): -

Temperature values (°C)

a. Fluid temperatures

	Min.	Max.
With air:	-25	55
With water:	-	-
With steam:	-	-
With oil:	-	-

Pressure values (Bar)

Min. pressure: 2.00
Max. press. (DC): 10.00
Max. press. (AC): 10.00

Power values (W)


Power DC: 0.4
Power AC: -

b. Ambient temperatures

Minimum: -25
Maximum: 50

Notes

- 1 Valve with NPT ports

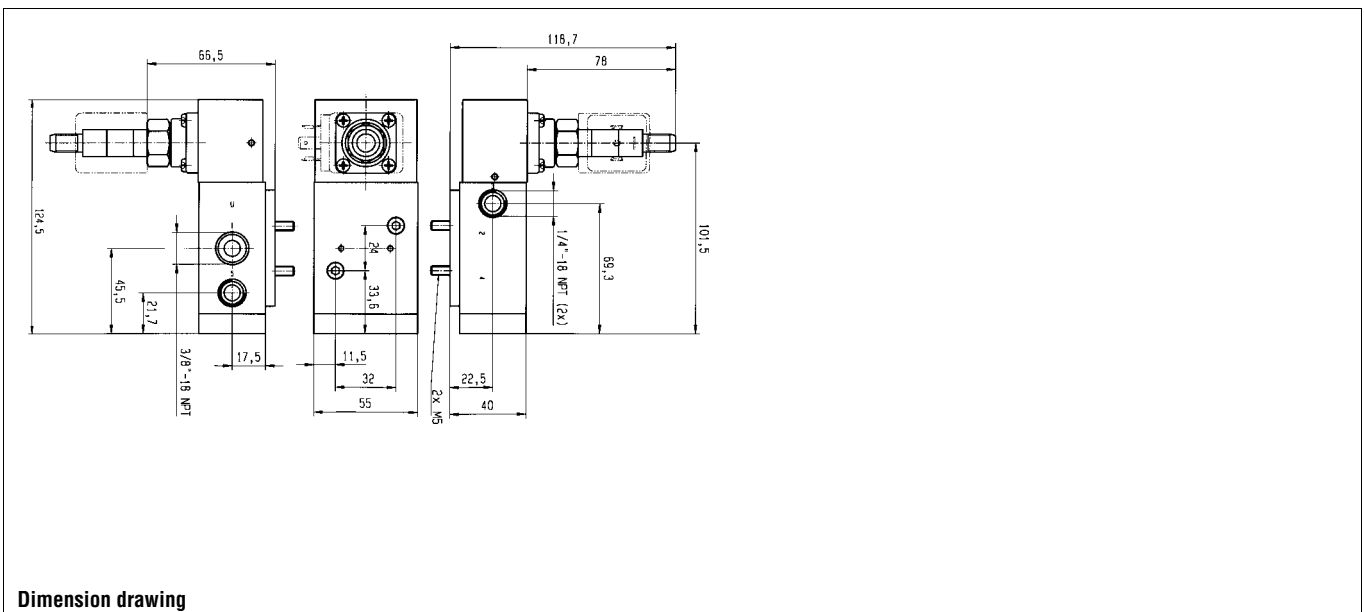

Dimension drawing